



# Fence systems

Product catalog



Blank Group

# Our company

The company Blank Metallbau-Technik GmbH is for about 40 years now leading manufacturer of protective grating systems for the automobile industry as well as for leading companies in the mechanical engineering and automation.

We are anxious to be an „All inclusive partner“ for our customers. Based on many requests we have decided for the outer fence sector and enlarged our product range. Since august 2006 we offer our customers a wide-ranging choice of several fence systems for the application at schools, sports facilities, golf courses, public and industrial buildings, airports and military facilities, fair buildings, prisons, animal parks, power stations, freeways and railways. We have a large product range of wire netting and welding palings with the pertinent accessories.

Our fence systems are made of high-quality steel wire and will be hot-dip zined in first step. Depending on customer's request all fence elements will be powder coated in all possible colours (powder coating is a electrostatic coating operation, which guarantees a long durability).

Assembly groups with specialists in the ranges of steel construction, welding technology, metal working etc. can take on the assembly for you. Suppliers and partners from several regions and countries allow us to manage a proper cost effectiveness, so that our customers also profit of.

Our customers can inspect on an area of 500m<sup>2</sup> with a skilled consulting a part of our product range. Our achievements „Round about the house“ also include winter gardens, carports, awnings, stairways, garden figures of stone and plastic etc. We decide locally together with you the details and make precise offers according to the desires of our customers. We gladly present our large product range in a personal discussion.


You have questions? You need skilled consulting? Please call us.  
Tel. +49(0)7031/73446-0.

[www.blank-mt.com](http://www.blank-mt.com)




Blank Group

# Blank Zaunsysteme

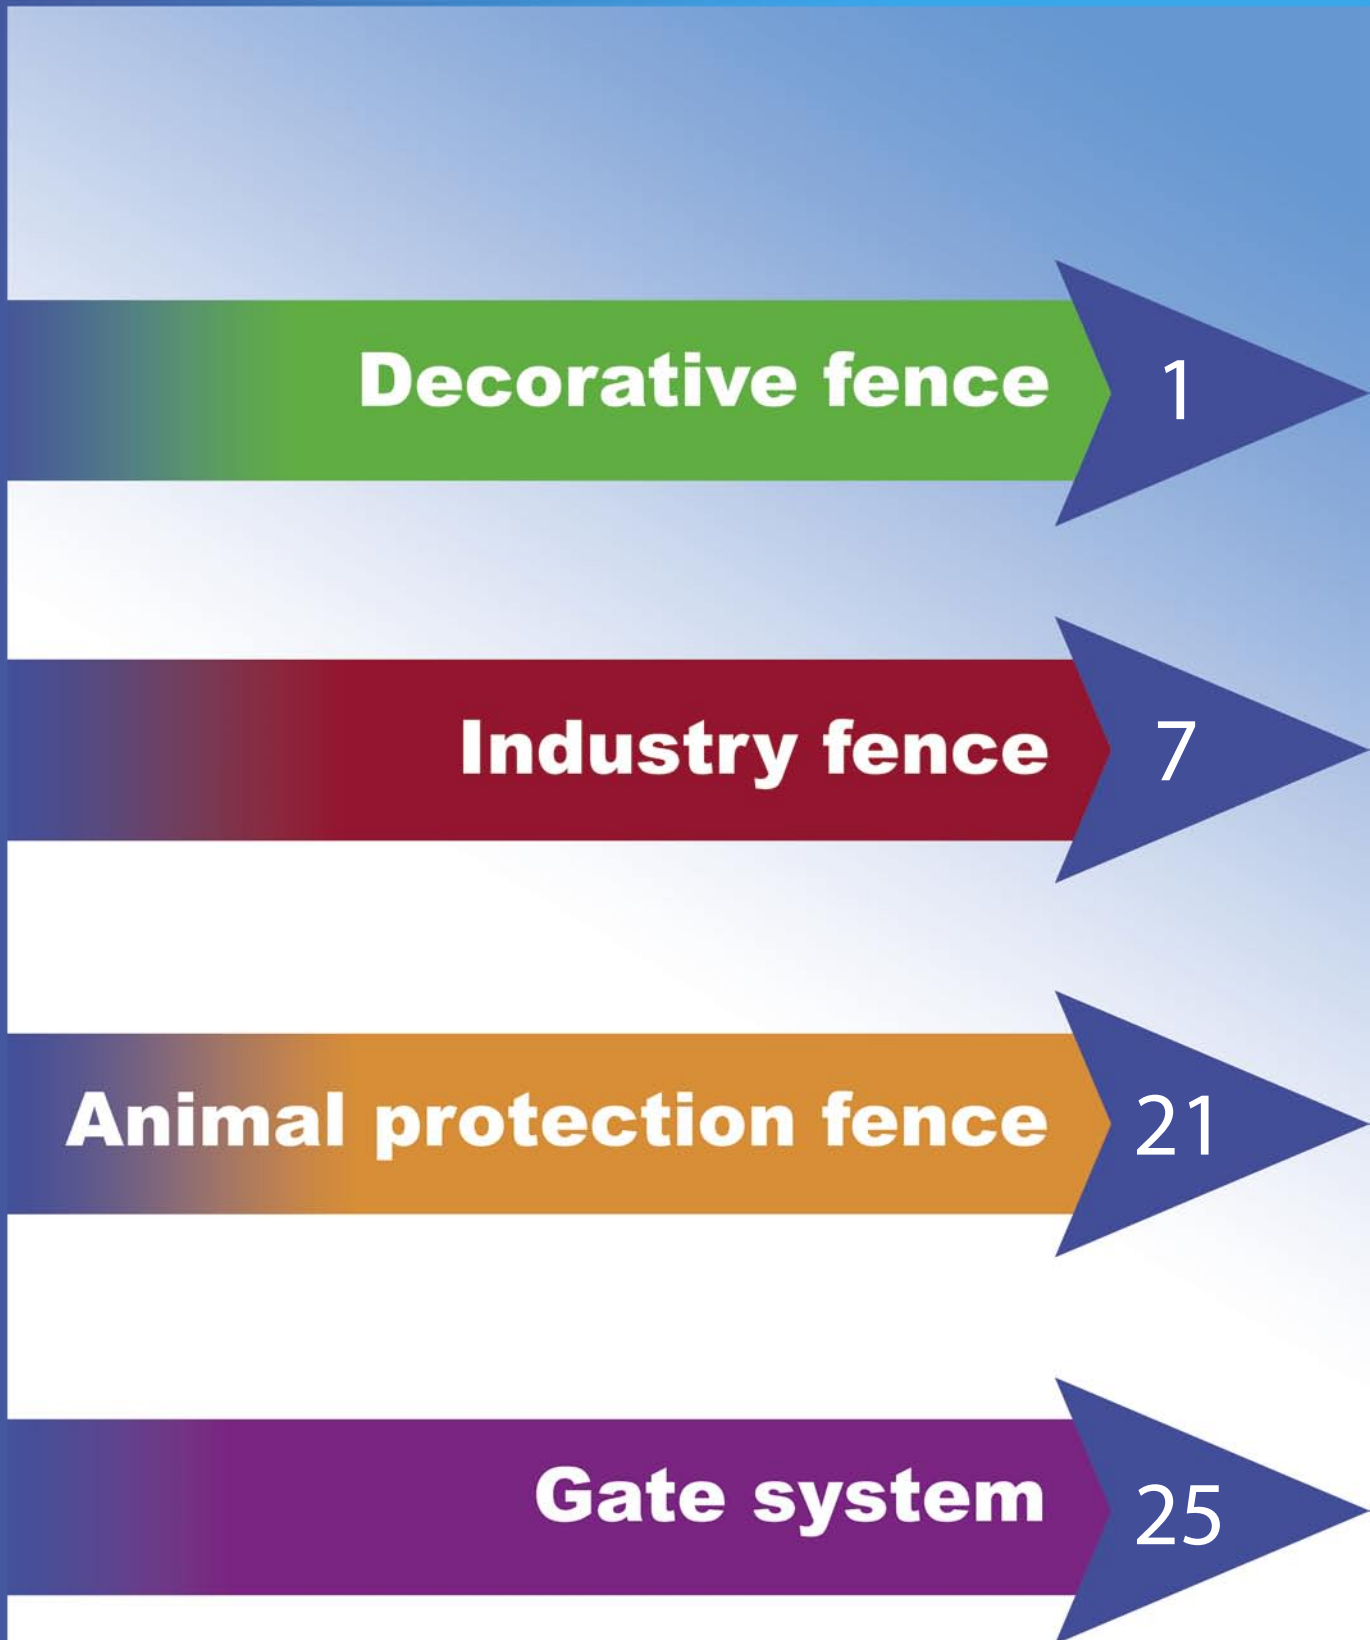

# Fence system

## Classico Z10



**Exclusivity and decorativeness are the characteristics of the Classico Z10 Fence system. Guaranteed an optimal protection for house and garden.**

# Decorative fence

## Uses

The system is perfectly suitable for the enclosure in populated areas.

## Coating

The powder coating procedure ensures a hundred percent corrosion protection, whereby the lattice mats are first of all galvanized and powder-coated then.

## Accessoires

The Classic system consists of lattice mats, posts, mounting material and special accessories such as post bases, corner clamps and wall fixing. The Classic system is completed by with an one-wing or a two-wing swing gate.

## Technical specifications

Classico Z10 lattice mats have a width of 2000mm and a height of 630 to 2030mm. The mesh size amounts to 50 x 100 mm with a wire size of 4.50 mm. Three-dimensional sicken lend a special optics and stability to the mat. The mats at metal posts with a diameter of 48 mm and a wall thickness of 1.5 mm are installed. Assembly handles make a fast, stable and simple assembly possible.

## Colour

RAL 6005 green

Delivery programm Classico Z10 fence system

Lattice height mm	Dimensions of the lattice mat W x H mm	Post length to concrete mm	post-lengthens with base assembly mm	Number of Assembly handle	Number Hit a corner wedge	Number Wall attachment
630	2000 x 630	1100	700	2	2	2
1030	2000 x 1030	1500	1100	2	2	2
1230	2000 x 1230	1700	1300	3	3	3
1530	2000 x 1530	2000	-	3	3	3
1730	2000 x 1730	2300	-	4	4	4
2030	2000 x 2030	2500	-	4	4	4

Delivery programm Classico Z10 one-wing gates

Width mm	Height mm	Wing width mm	Distance between the posts in mm	Platzbedarf mm
1000	1030	966,5	1048,5	1168,5
1000	1230	966,5	1048,5	1168,5
1000	1530	966,5	1048,5	1168,5
1000	1730	966,5	1048,5	1168,5
1000	2030	966,5	1048,5	1168,5


Delivery programm Classico Z10 two-wing gates

Breite mm	Höhe mm	Flügelbreite mm	Abstand zwischen den Pfosten mm	Platzbedarf mm
3000	1030	1466,5	3053	3173
3000	1230	1466,5	3053	3173
3000	1530	1466,5	3053	3173
3000	1730	1466,5	3053	3173
3000	2030	1466,5	3053	3173



# Fence system

## Antik Z11



**The antique Z11 fence-system stands for exclusivity and decorativeness, which not only guarantees an optimal protection for house and garden but also offers with its innovative and unique design a real alternative to the expensive smithy-iron-fence.**

# Decorative fence

## Uses

The system is perfectly suitable for the enclosure in populated areas.

## Coating

The powder coating procedure ensures a hundred percent corrosion protection, whereby the lattice mats are first of all galvanized and powder-coated then.

## Accessoires

The Antik Z11 system consists of lattice mats, posts, mounting material and special accessories such as post bases, corner clamps and wall fixing. The Antik Z11 system is completed by with an one-wing gate.

## Technical specifications

Antique is point-welded Z11 out of betrayed wires fence-mats and has a width of 2015mm and a height from 900 to 1500mm. The stitch-wideness amounts to 65 x in 200 mm with a wire-diameter as well as horizontally as also vertically from 5 mm. Horizontally proceeding doubles-wires give the mat a special stability.

The mats are installed at metal-posts with a diameter of 48 mm and one Wall-strength of 1,5 mm. Montage-clips make one fast, stable and simple montages possible.

## Farbe

RAL 6005 grün  
RAL 7016 anthrazit- metallic

Delivery programm Antik Z11 fence system

Fence-height mm	Measurements the fence-mat B x H mm	Post-length to the cement mm	Post-length with Pedestal-montages mm	Number assembly-clips	Number corner sticks	Number Wall-fortification
900	2015 x 900	1100	900	2	2	2
1100	2015 x 1100	1300	1100	2	2	2
1300	2015 x 1300	1500	1300	3	3	3
1500	2015 x 1500	1700	-	3	3	3

Delivery programm Antik Z11 one-wing gate

Width mm	Height mm	Wing-width mm	Distance between the posts mm	Required space mm
1000	1100	937	1030	1150
1000	1300	937	1030	1150
1000	1500	937	1030	1150



# Fence system

## Antik Z12



**Attractive modern  
Design combined they are with high  
stability qualities of the Antik Z12  
Ornament-fence-system. For  
Application of private as also at  
public buildings.**

# Decorative fence

## Uses

The system is suitable for both the private area and for public buildings, schools, parks, administrations, swimming pools, etc.

## Coating

All elements of this become in order to guarantee a long lifespan Betrays fence-system once and equips with a custody-layer afterwards. A smooth one enables this and before weather of protected surface.

## Accessoires

Das Antik Z12 decorative-fence-system exists from perfectly one on top of the other voted components like fence-mats, posts and one or two-winged gates in the design.

## Technical specifications

The fence-mats are point-welded out of betrayed round-wires and have a width of 2015mm. The stitch-wideness amounts to 65 x in 200 mm with a wire-diameter from horizontally 8mm and vertically 6mm. Horizontally proceeding doubles-wires give the mat a special stability.

This out of square-tube 60 x 60 x awarded 1,5mm produced metal-posts all a landed metal-ball they the ornament-fence-system a special grade. With fortification-clips and security-screws, the fence-mats are installed at the post.

## Colour

Antik Z12 can only be delivered in the standard colours  
 RAL 9005 black  
 RAL 9010 white  
 RAL 6005 green




Delivery programm Antik Z12 fence system				
Bent fence-mat Wide x height / mm (Height in mat-middle)	Straight fence-mat Wide x height / mm	Length of the post in mm		Number of Fortification-bells/ post
		For the Foundation-montages	Posts with Aluminum-bottom disk	
2015 x 886	2015 x 762	1500	965	2
2015 x 1086	2015 x 962	1500	1165	3
2015 x 1286	2015 x 1162	1750	1365	3
2015 x 1486	2015 x 1362	2000	1565	3

Delivery programm Antik Z12 wing-gates			
Width mm	Height mm	Post-measurements	Distance between the posts
<b>One-wing gates</b>			
1000	1028	80 x 80 x 3	1020
1000	1280	80 x 80 x 3	1020
1000	1480	80 x 80 x 3	1020
1000	1880	80 x 80 x 3	1020
<b>Two wing-gates</b>			
3500	1080	100 x 100 x 3	3560
3500	1280	100 x 100 x 3	3560
3500	1480	100 x 100 x 3	3560
3500	1880	100 x 100 x 3	3560

# Fence system

## Classico Z13



**The Classico Z13 fence-system is as well as in price as also montage-technically one Alternative to the traditional one Industry-fence. The application-area be enough from the private property until to gigantic industry-installations.**

# Industry fence

## Uses

The system is for both the private area and for public buildings, Parks, playgrounds until to Industry-installations been suitable.

## Lifespan

This already in the production would use wires betrayed guarantees a weather-protection. The stations, also as this, become in order to increase however the lifespan of the fence Fence-mats with a custody - and afterwards with a PVC - layer coats.

## Accessories

The system is hook-screws completely with fence-mats, posts, and Mat-connectors available. Information about gate-systems on inquiry.

## Technical specifications

The fence-mats have a variable width of 2500 and 3000mm, the height is between 630 to 2430 mm available. Perpendicular 30mm high survive serves the Übersteigungsschutz, should direct at low heights on grounds of the accident-danger downward, however, is installed. Through the three-dimensional distinction, the mat gets stability and optically a special grade.

With hook-screws, the fence-mats turn 2 at 60 x 40 x mm rectangle-posts install. Together with the particular mat-connectors, an unending-montage of the fence-mats is made possible, and one fast and efficient installation guarantees.

## Colour

Fires betrayed

RAL 6005 green

RAL 9010 white

RAL 7030 grey

RAL 7016 anthracite

Special-colors are available on inquiry.

Delivery programm Classico Z13 fence system						
Mat type	Posts type 1 Depth / width / wall- strength x length in mm	Fences B x H in mm	Number Distinctions	Fortifications per posts	Number Mat-connectors	Meshes in mm
<b>Medium System</b>						
10/5 NMD	60/40/2 x 1500	2500 x 1030	2	3	5	50 x 100
12/5 NMD	60/40/2 x 1700	2500 x 1230	2	3	5	50 x 100
15/5 NMD	60/40/2 x 2000	2500 x 1530	3	4	6	50 x 100
17/5 NMD	60/40/2 x 2200	2500 x 1730	3	4	8	50 x 100
20/5 NMD	60/40/2 x 2600	2500 x 2030	4	5	8	50 x 100
<b>3D System</b>						
6/5 N3D	60/40/2 x 1000	2500 x 630	2	2	3	50 x 200
10/5 N3D	60/40/2 x 1500	2500 x 1030	2	3	4	50 x 200
12/5 N3D	60/40/2 x 1700	2500 x 1230	2	3	5	50 x 200
15/5 N3D	60/40/2 x 2000	2500 x 1530	3	4	5	50 x 200
17/5 N3D	60/40/2 x 2200	2500 x 1730	3	4	6	50 x 200
20/5 N3D	60/40/2 x 2600	2500 x 2030	4	5	6	50 x 200
<b>3-M System</b>						
10/5 3-M	60/40/2 x 1500	3000 x 1030	2	3	4	50 x 200
12/5 3-M	60/40/2 x 1700	3000 x 1230	2	3	5	50 x 200
15/5 3-M	60/40/2 x 2000	3000 x 1530	3	4	5	50 x 200
17/5 3-M	60/40/2 x 2200	3000 x 1730	3	4	6	50 x 200
20/5 3-M	60/40/2 x 2600	3000 x 2030	4	5	6	50 x 200
24/5 3-M	60/40/2 x 3200	3000 x 2430	4	6	8	50 x 200



# Fence system

## Flachstab Z14



**This fence-system is drawing use-areas through its wide spectrum and the favorable price-relationship from. With its stable fence-implementation, its smooth one . This fulfills fence-form, its narrow meshes and its survive Fence-system one high extent at security.**

# Industry fence

## Uses

For grounds, parks, schools,  
Game and playing fields, public  
Facilities u. Buildings,  
Industry-terrains

## Lifespan

The powder-coating-procedure guarantees a hundred percent corrosion-protection, with what the fence-mats betray at first once and then are powder-coated.

## Accessoires

The system is hook-screws completely with fence-mats, posts, and Mat-connectors or U - profile-strip available. Complete the system we with one and two-winged gates or Schiebetoren.

## Technical specifications

The fence-mat consists them/her/it of vertical rods and scales-right flat-steel-profile to a high-solid steel-mat point-welds becomes.

- Round-iron vertical:  $\varnothing$  5mm
- Flat-iron scales-right: 15 x 6mm
- Mat-length: 2500mm
- Maschung: 50 / 200mm
- Mat-height: 830 - 2430mm

Serve the safety one-sided vertical 30mm high survive should direct at low heights on grounds of the accident-danger downward, however, is installed.

With hook-screws or nonstop U - profile as chimney becomes the fence-mats at 60 x 40 x in 2 mm rectangle-posts installs. It is made by it possible to post-montage of the fence-mats an unending things or support, and one fast and efficient installation guarantees.

## Colour

Fires betrayed

RAL 6005 green

RAL 9010 white

RAL 7030 grey

RAL 7016 anthracite


Special-colors are available on inquiry

Lieferprogramm Flachstab Z14 Zaunsystem					
Mat type	Posts Typ1 Depth / width / wall- strength x length in mm	Fence-height in mm	Fortifications per Posts	Number Mat-connectors	Meshes in mm
6/5 F	60/40/2 x 1000	630	2	4	50 x 200
8/5 F	60/40/2 x 1300	830	3	5	50 x 200
10/5 F	60/40/2 x 1500	1030	3	6	50 x 200
12/5 F	60/40/2 x 1700	1230	3	7	50 x 200
14/5 F	60/40/2 x 2000	1430	4	8	50 x 200
16/5 F	60/40/2 x 2200	1630	4	9	50 x 200
18/5 F	60/40/2 x 2400	1830	4	10	50 x 200
20/5 F	60/40/2 x 2600	2030	5	11	50 x 200
22/5 F	60/40/2 x 3000	2230	5	12	50 x 200



# Fence system

## Doppelstab Z15



**An universal one and  
at the same time stable  
Fence-system with  
unlimited  
Use-possibilities.**

# Industry fence

## Uses

For parks, schools,  
Game and playing fields, public  
Facilities and buildings,  
Industry-terrains, airports, military-installations

## Corrosion-protection

In order to guarantee a long lifespan, all elements of the fence-system are betrayed once, equip with a custody-layer and powder-lacquer afterwards. A smooth one enables this and before weather of protected surface.

## Accessoires

Belong to the delivery-program: Fence-mats, posts, one and two-winged gates, Schiebetore and ball-catch-fence - system (on inquiry).

## Technical specifications

Perpendicular and scales-right rods this in the cross-system together point-welds is the fence-mat her/its/their high stability lends.

- Vertical wire: Ø 6mm or for the easy variation Ø 5mm
- Waagrechter wire: 8mm (double) or for the easy variation Ø 6mm, double)
- Mat-length: 2500mm
- Maschung: 50 x 200mm
- Mat-height: 630 - 2430mm heavy
- 1030 - 2030mm easily  
(wide heights on inquiry)

With nonstop U - profile as chimney becomes the fence-mats 1,5 and 2 at 60 x 40 x mm rectangle-posts installs. One is made by it possible for posts to post-montage also at uneven terrain, and one fast and efficient installation guarantees.

## Colour

Fires betrayed

RAL 6005 green

RAL 9010 white

RAL 7030 grey

RAL 7016 anthracite


Special-colors are available on inquiry

Delivery programm doubles-rod Z15 fence system				
Mat type	Posts type D Depth / width / wall- strength x length in mm	Fence-height in mm	Fortification per posts	Meshes in mm
<b>Heavy (6/6/8)</b>				
6/5 D	60/40/1,5 x 1000	630	2	50 x 200
8/5 D	60/40/1,5 x 1300	830	3	50 x 200
10/5 D	60/40/1,5 x 1500	1030	3	50 x 200
10/10 D	60/40/1,5 x 1500	1030	3	100 x 200
12/5 D	60/40/1,5 x 1700	1230	3	50 x 200
14/5 D	60/40/1,5 x 2000	1430	4	50 x 200
16/5 D	60/40/1,5 x 2200	1630	4	50 x 200
18/5 D	60/40/2 x 2400	1830	4	50 x 200
20/5 D	60/40/2 x 2600	2030	5	50 x 200
20/10 D	60/40/2 x 2600	2030	5	100 x 200
22/5 D	60/40/2 x 3000	2230	5	50 x 200
24/5 D	60/40/2 x 3200	2430	6	50 x 200
<b>Light (6/6/5)</b>				
10/5 D	60/40/1,5 x 1500	1030	3	50 x 200
12/5 D	60/40/1,5 x 1700	1230	3	50 x 200
14/5 D	60/40/1,5 x 2000	1430	4	50 x 200
16/5 D	60/40/1,5 x 2200	1630	4	50 x 200
18/5 D	60/40/2 x 2400	1830	4	50 x 200
20/5 D	60/40/2 x 2600	2030	5	50 x 200



# Fence system

## Stabilo Z16

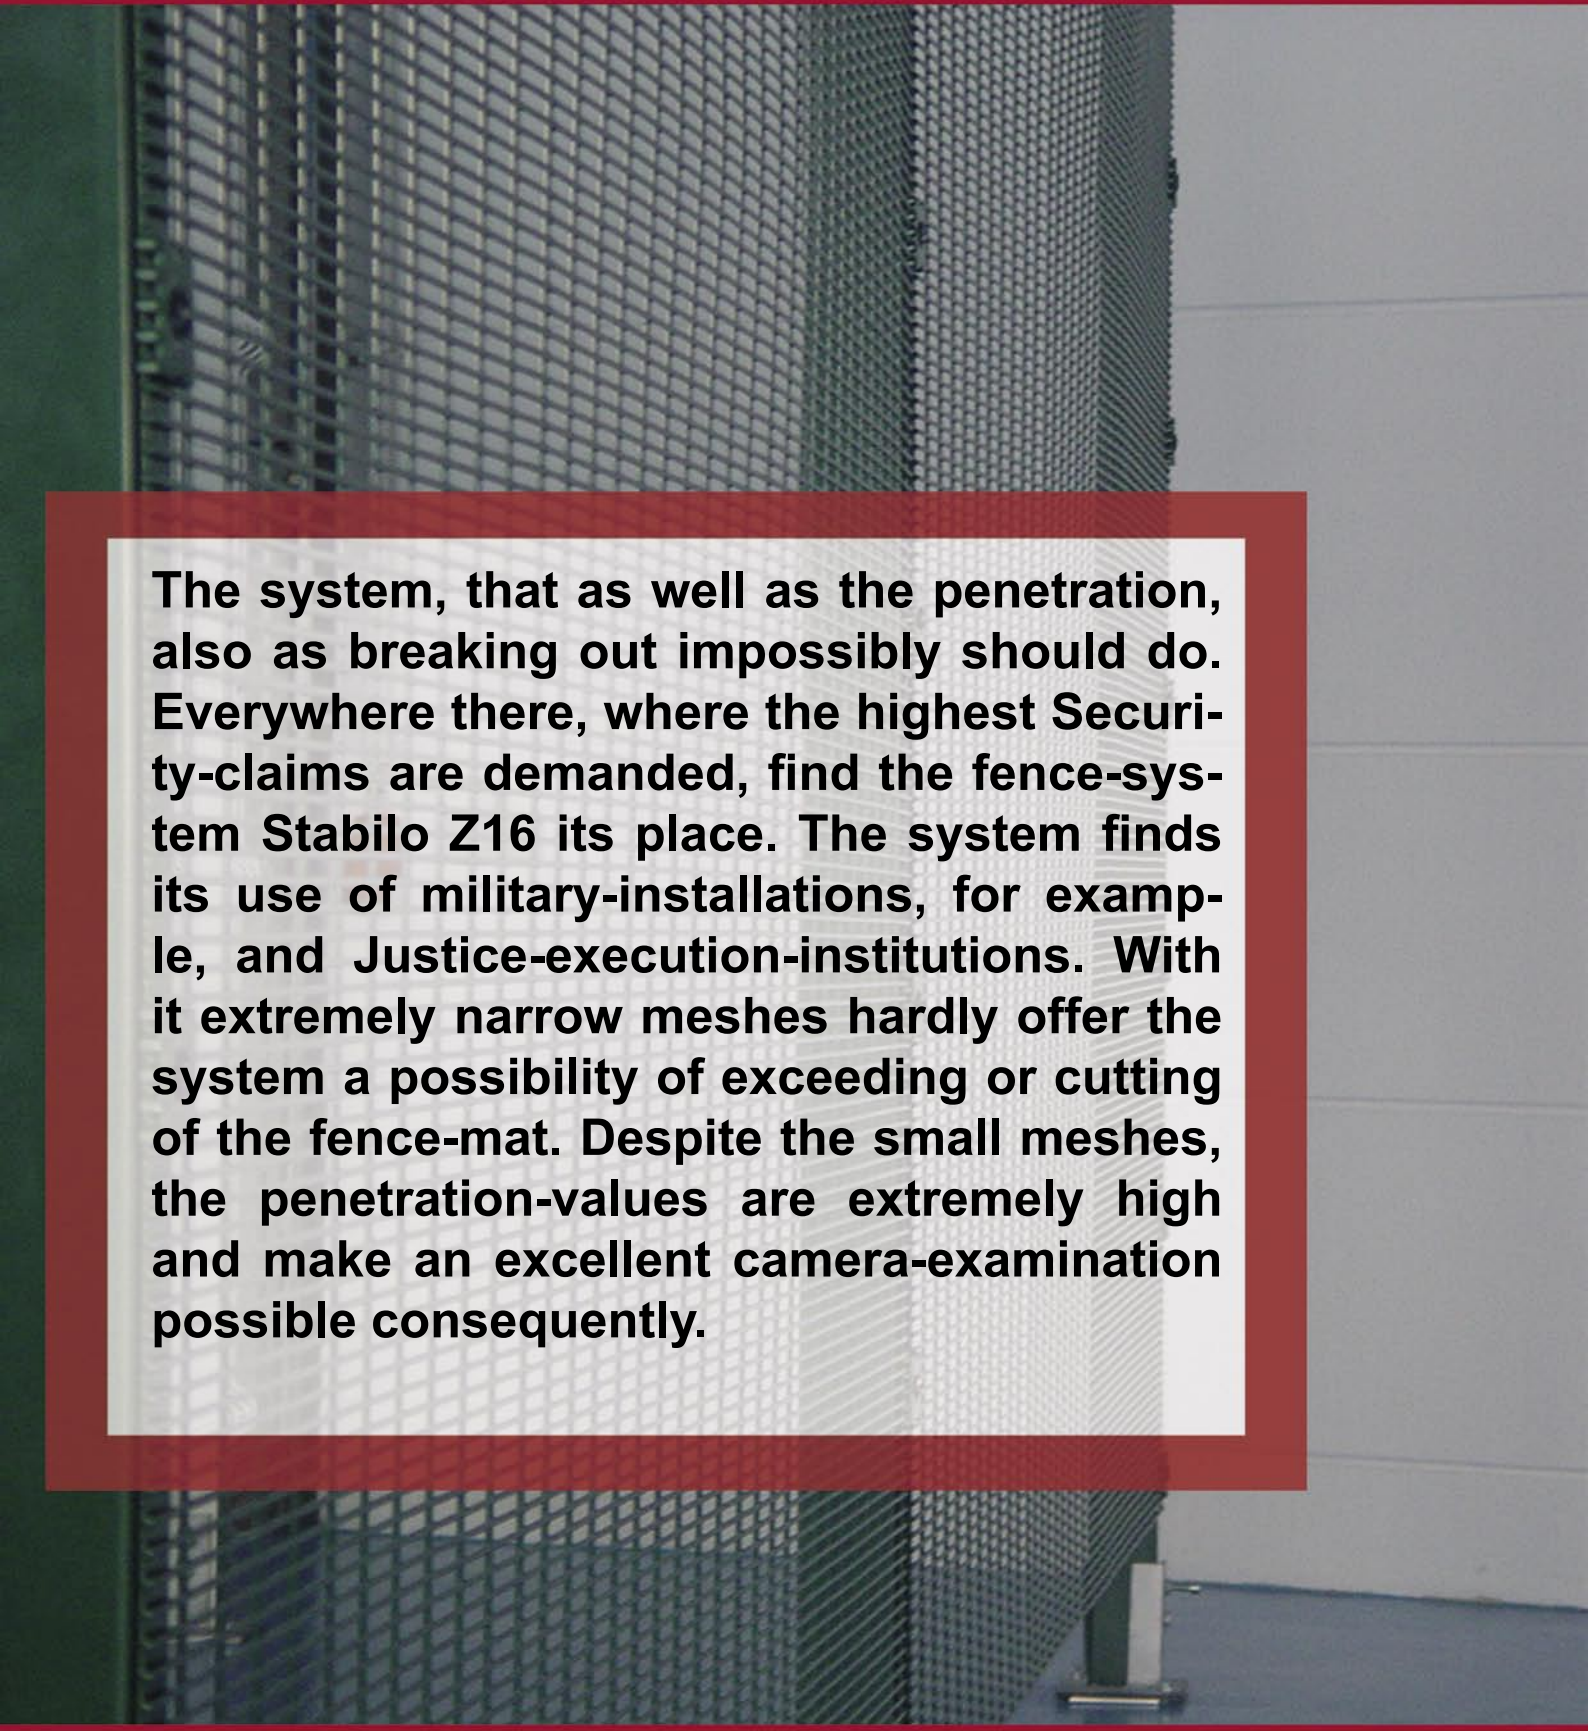

The system, that as well as the penetration, also as breaking out impossibly should do. Everywhere there, where the highest Security-claims are demanded, find the fence-system Stabilo Z16 its place. The system finds its use of military-installations, for example, and Justice-execution-institutions. With it extremely narrow meshes hardly offer the system a possibility of exceeding or cutting of the fence-mat. Despite the small meshes, the penetration-values are extremely high and make an excellent camera-examination possible consequently.

# Industry fence

## Anwendungen

Für Schulen, Krankenhäuser, Bahnhöfe, Militäranlagen, Justizvollzugsanstalten, Psychatrien, Lagerhäuser, Chemielabors, Kraftwerke, Logistikzentren, Industrieanlagen.....

## Corrosion-protection

In order to guarantee a long lifespan, all elements of the fence-system are betrayed once, equip with a custody-layer and powder-lacquer afterwards. A smooth one enables this and before weather of protected surface.

## Accessoires

The system is supplemented through matching gate-installations with identical filling.

## Technical specifications

The fence-mats are 12,7 with the meshes of 76,2 x mm point-welds and is in the heights in 2010,60 mm or 2417 mm and with a width of 2518,6 mm available. The fence-mats are available at one piece up to 6,30 m of height.

Bigger heights can one on the other-install the fence-mats through trouble-free is reached. The 3D reading with their three-dimensional distinction, it awards him/it System an aesthetic optics.

Fence-mats can be installed at two post-systems.

- Rectangle-profile 80 x 60 x 2,5mm with fortification-clamps.
- Omegaprofile:
  - 140 x 115x 3mm (at fence-heights of 3-4 m))
  - 40 x 150 x 5mm, at fence-heights up to 6m)

with a nonstop roof.


## Colour

Standard RAL 6005 gree

Other colors or surfaces in zincau are available on inquiry.

Delivery programm Stabilo Z16 fence system

Wide x height mm	Number Fortification- clinch	Height mm	Rectangle-posts			
			Between - u. End posts		Corner posts	
2518,6 x 2000	7	2000	80 x 60 x 2,5	2700	80 x 80 x 3	2700
2518,6 x 2400	8	2400	80 x 60 x 2,5	3100	80 x 80 x 3	3100

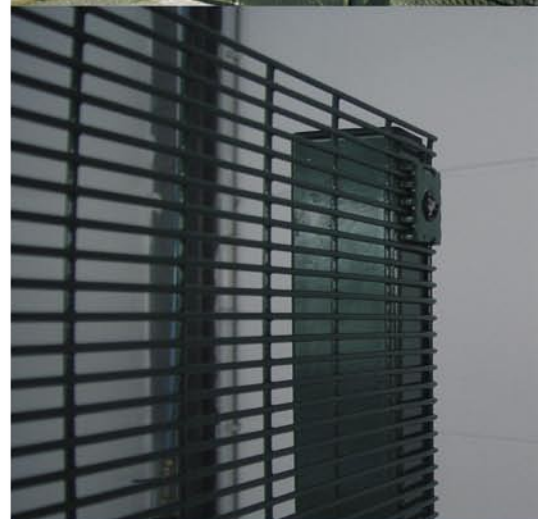

# **Fence system**

## **Rollo Z17**



**The Rollo Z17 fence-system! Composed out of plastic-coated wires this to welds a fence between roles becomes. Roller blind Z17 is a system this ideally for Private-properties and parks and consequently an alternative to the traditional stitch-wire-fence. By the post-system, an optimally tense fence-fence is guaranteed. A flat and aesthetic appearance is this Result this particularly for them/her/it Application in the residential-area suitable is.**

# Industry fence

## Uses

Very commendable for grounds as well as Parks. As well for schools, Sport-places, industry-installations and public buildings.



## Technical specifications

The system is Protect, Family and Basic available in three types. The clip-post-system guarantees one fast and professional montages. The fence-fence is betrayed and with a perfectly adhesive PVC-Schicht coats these a long lifespan guarantees.

The stitching of the point-welded fence-fence amounts to 50,8 according to type's 50,8 x mm until 101,6 x 50,8 mm. To the increase of the stability is in the distance 25,4 above and below mm an additional one horizontal wire one-welded.

The posts of steel-tube are indoors and outside betrayed and in the connection with a polyester-coating equipped.

## Colour

Fence: RAL 6073 (color-like to 6005)  
 Posts: RAL 6005 moss-green




Delivery programm Rollo Z17 fence system					
Type	Meshes mm	Wire-diameters		Tensile strength	
		Horizontal mm	Vertical mm	Horizontal mm	Vertical mm
Pantanel Protect	50,8 x 50,8	2,50	2,20	400-550N/mm <sup>2</sup>	700-900N/mm <sup>2</sup>
Pantanel Family	101,6 x 50,8	2,50	2,50	400-550N/mm <sup>2</sup>	700-900N/mm <sup>2</sup>
Pantanel Basic	76 x 63	2,50	2,20	400-550N/mm <sup>2</sup>	700-900N/mm <sup>2</sup>

Delivery programm Rollo Z17 fence system					
Role-length mm	Instep - and corner posts		Inter-posts		Inter-posts from PVC
	Length mm	Diameters mm	Length mm	Diameter mm	Diameter mm
610	1200	44	1200	44	48
810	1500	44	1500	44	48
1020	1500	44	1500	44	48
1220	1700	44	1700	44	48
1520	2000	48	2000	44	48
1830	2300	60	2300	48	48
2030	2500	60	2500	48	48

# Zaunsystem

## Rollo Z18

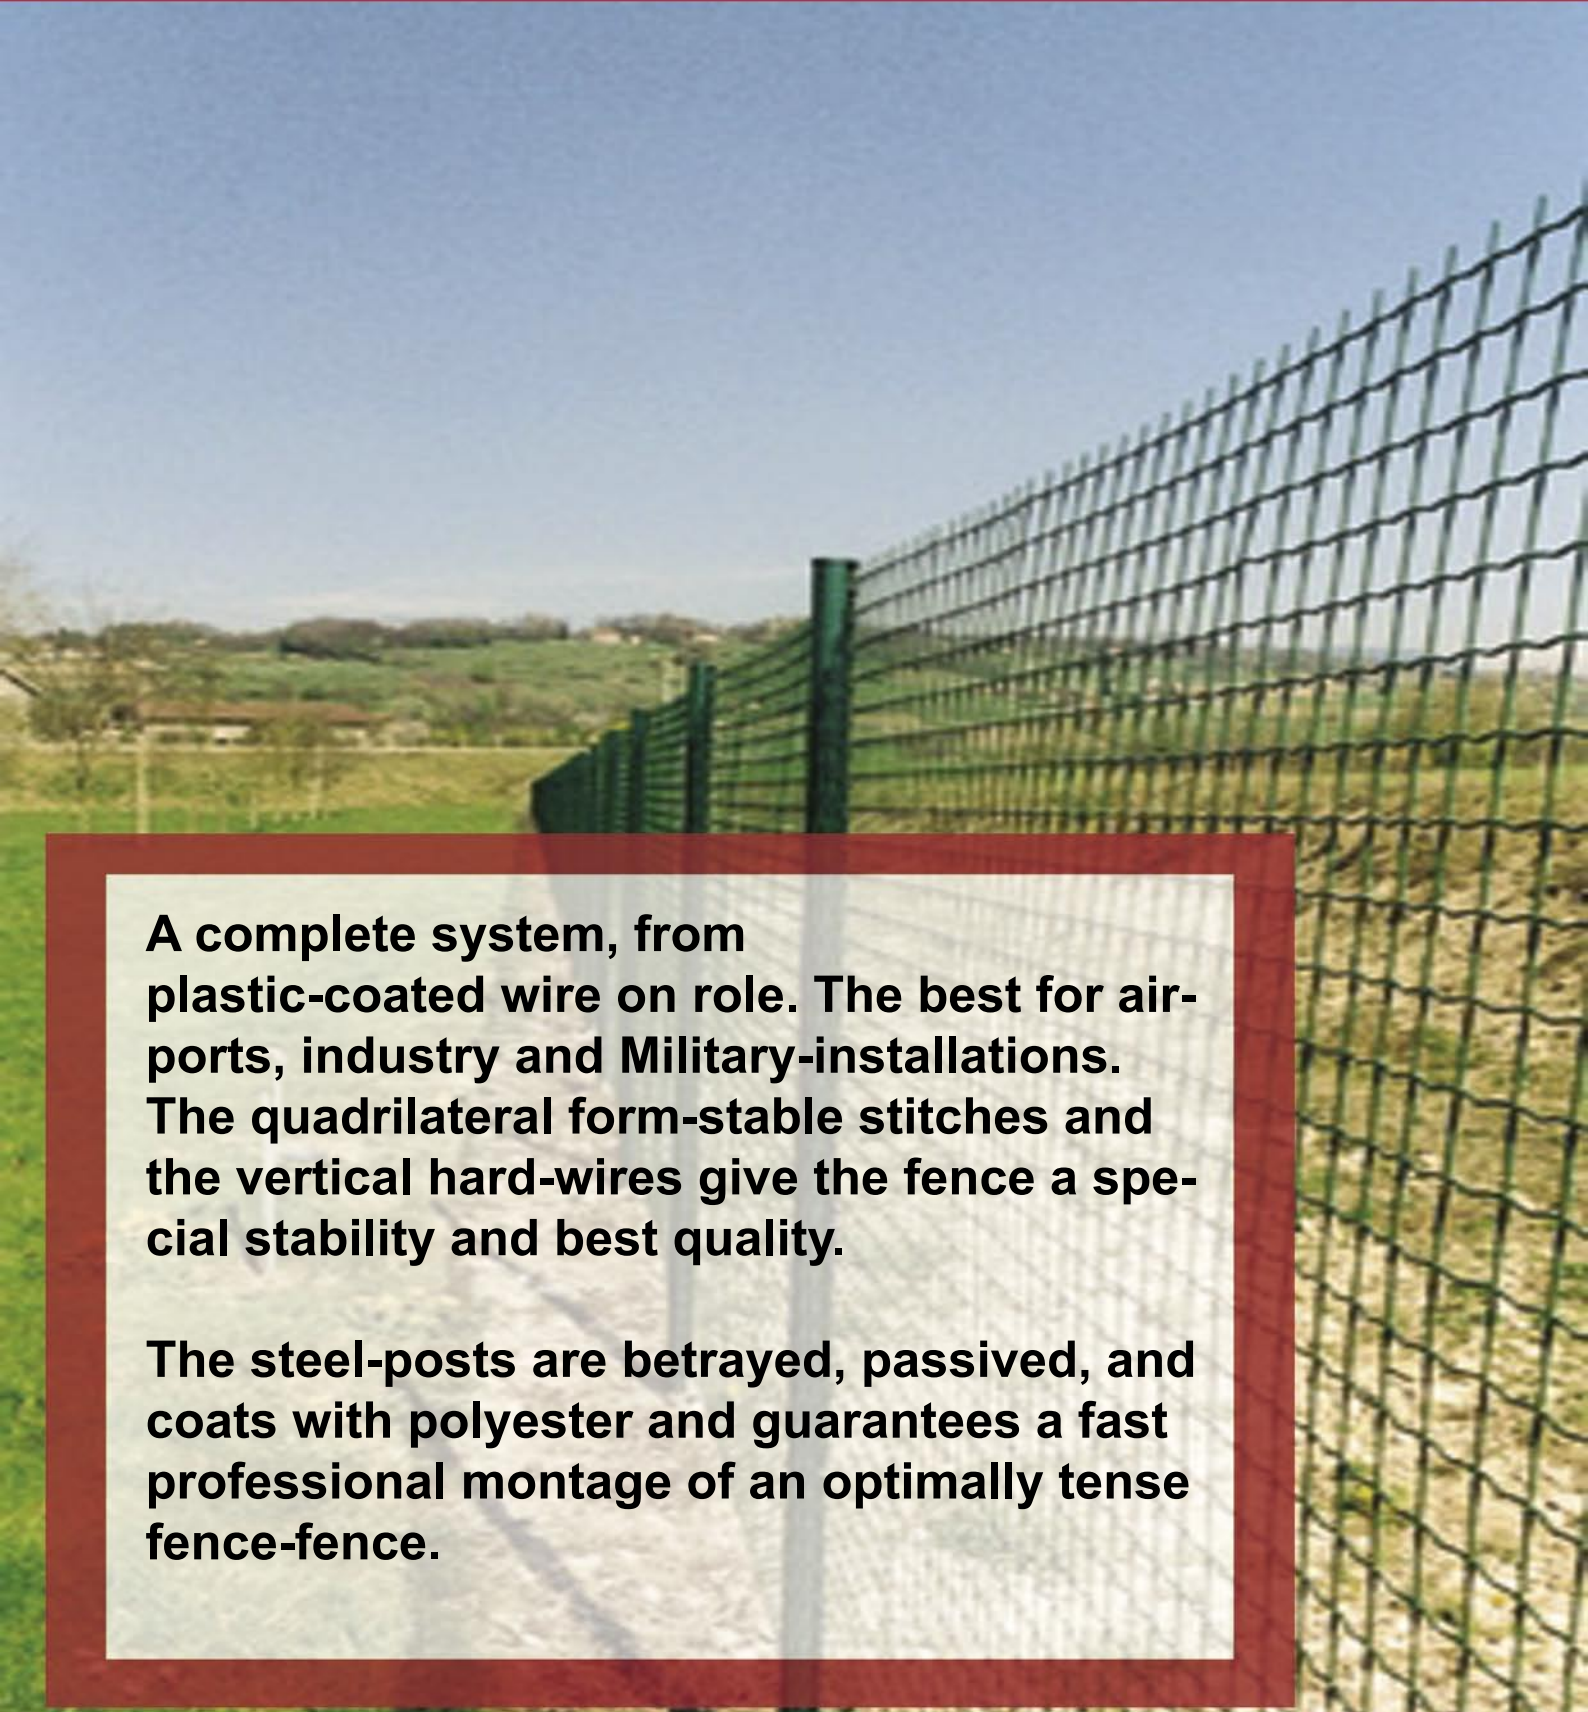

**A complete system, from plastic-coated wire on role. The best for airports, industry and Military-installations. The quadrilateral form-stable stitches and the vertical hard-wires give the fence a special stability and best quality.**

**The steel-posts are betrayed, passived, and coats with polyester and guarantees a fast professional montage of an optimally tense fence-fence.**

# Industry fence

## Uses

Very commendable for grounds as well as Parks. As well for schools, Sport-places, industry-installations, logistics-centers, public buildings, airports and military-installations



## Technical specifications

The fence is out of point-welded betrayed wire. The wires have a ribbing with every stitch. The fence-height is from 1020 - 2460 mm and in the lengths of 1500-3250mm available. The posts of steel-tube are indoors and outside betrayed and in the heights from 1500 - 3250mm available. The diameter of the instep-posts of 44-70mm guarantees a high steadiness. The instep and inter-posts are with montage-flanges and one Plastic-cap equipped. The fortification-clips are out of stainless-steel. Through the wing-gates and slide-gates, the system is completed.

## Colour

Fence: RAL 6073 (colour-like to 6005)  
 Post: RAL 6005 moss-green

Delivery programm Rollo Z18 fence system					
Type	Meshes mm	Wire diameter		Tensile strength	
		Horizontal mm	Vertical mm	Horizontal mm	Vertical mm
Rollo Z18 Medium	50,8 x 50,8	2,95	2,95	400-550N/mm <sup>2</sup>	650-850N/mm <sup>2</sup>
Rollo Z18 Super	50,8 x 50,8	2,50	3,50	400-550N/mm <sup>2</sup>	600-800N/mm <sup>2</sup>

Delivery programm Rollo Z18 Fence system												
Fence-heightmm	Roles height in mm	Thorn-wire mm	Instep-posts			Quests			Inter-posts			
			Lengt mm	Diameter mm	Wall-streng mm	Lengt mm	Diameter mm	Wall-streng	Steel		PVC	
									Lengt mm	Diameter mm	Wall-stren	Diameter mm
1020	1020	--	1500	44	1,00	1500	38	1,50	1500	44	1,00	48
1220	1220	--	1700	48	1,50	1750	38	1,50	1700	44	1,00	48
1500	1500	--	2000	48	1,50	2200	38	1,50	2000	48	1,50	48
1800	1800	--	2500	60	2,00	2700	38	1,50	2300	48	1,50	48
2010	2010	--	2700	60	2,00	2700	38	1,50	2500	48	1,50	48
2510	2510	--	3250	70	2,00	3000	48	1,50	3000	60	2,00	48
1 row Thorn-wire												
2000	1800	200	2700	60	2,00	2700	38	1,50	2700	48	1,50	
2210	2010	200	3000	60	2,00	3000	38	1,50	3000	48	1,50	
3 rows Thorn-wire												
2250	1800	450	3000	60	2,00	3000	38	1,50	3000	48	1,50	
2460	2010	450	3000	60	2,00	3000	38	1,50	3000	48	1,50	
With bend 45°												
2100	1800	3Reihen	3250	60	2,00	2700	38	1,50	2700	48	1,50	
2310	2010	3Reihen	3250	60	2,00	3000	48	1,50	3000	48	1,50	



# Fence system

## Rollo Z19



**Efficiently and simply!  
Stability and flexibility on  
The qualities are role they the  
system from woven  
rhombic stitches  
mark.**

# Industry fence

## Uses

Commendable for game - and  
Playing fields or yards.



## Coating

The approved powder-coating-technology grants a very long life-duration. All elements of the fence-system are betrayed and afterwards through the PE - as well as. PVC - protected coating optimally before all weather-influences.

## Accessoires

The system is compatible with the round-tube-post of steel.

## Technical specifications

The quadrangle-network consists of hard kernel-wires. A high stability of the meshes is guaranteed through it. The stitches have a wideness of 40 - 60mm and one Wire-diameters of 2,8 - 3,1 mm. Through his/its flexibility, each terrain adjusts itself and is available from 800 - 2000mm amounts on 25m roles.

## Colour


green (RAL 6005)



Delivery programm Rollo Z19 fence system				
Stitch-wideness	Wire-diameters	Height	Role-length m	
60	2,8	800	25	15
60	2,8	1000	25	15
60	2,8	1250	25	15
60	2,8	1500	25	15
60	2,8	1750	25	
60	2,8	2000	25	
50	2,8	800	25	
50	2,8	1000	25	
50	2,8	1250	25	
50	2,8	1500	25	
50	2,8	1750	25	
50	2,8	2000	25	
50	3,1	1000	25	
50	3,1	1250	25	
50	3,1	1500	25	
50	3,1	1750	25	
50	3,1	2000	25	
40	2,8	800	25	
40	2,8	1000	25	
40	2,8	1250	25	
40	2,8	1500	25	
40	2,8	1750	25	
40	2,8	2000	25	

# Fence system

## Rollo Z20

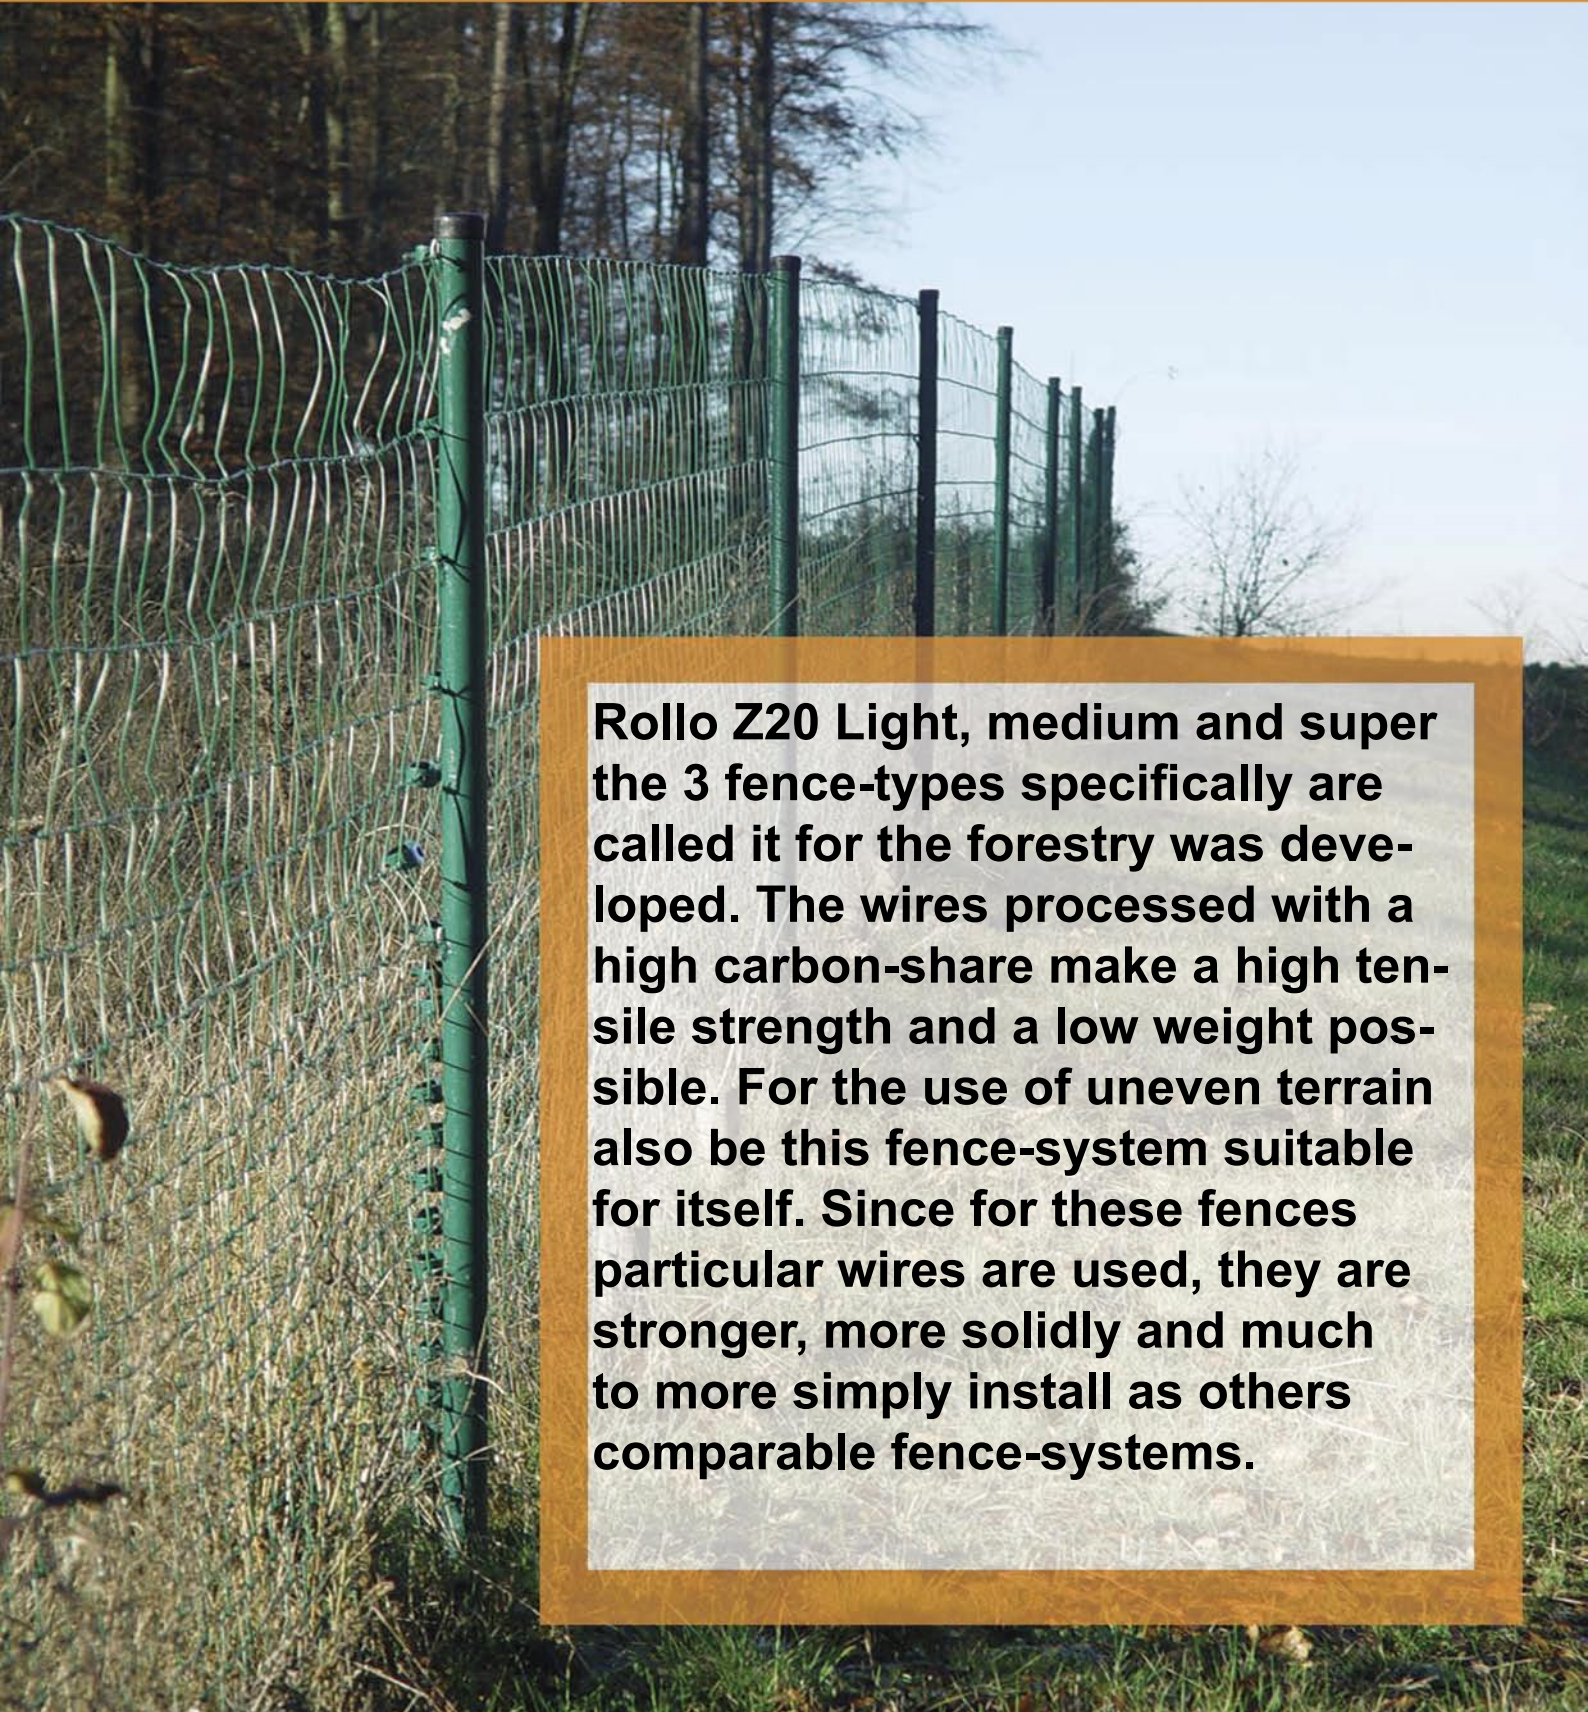

**Rollo Z20 Light, medium and super the 3 fence-types specifically are called it for the forestry was developed. The wires processed with a high carbon-share make a high tensile strength and a low weight possible. For the use of uneven terrain also be this fence-system suitable for itself. Since for these fences particular wires are used, they are stronger, more solidly and much to more simply install as others comparable fence-systems.**

# Animal protection fence

## Uses

At iron and highways, Z20 „Light“ and „medium“ are empfelenswert roller blind to the protection of deer, boars and hares. With large accumulations of game, roller blind is Z20 „Super“ ideally suitable.



## Technical specifications

### Light


To the enclosure of spacious surfaces like Z.B. Forest or heath, pastures for deer, etc.

### Medium

This fence-system is suitable to hold itself/themselves the different game-types especially well thanks to his/its form-stability to it within her/its/their territory.

### Super

If one combines resistance-strength and form-solidity with big fence-heights, one gets this advantageous fence-system. The system makes this to the application in Arealen with high game-emergence ideally.



## Colour

Ursus ASMedium green (RAL 6005)




Delivery programm Rollo Z20 Light			
Height in mm	Number horizontal-wires/ Distance vertical-wires	Drawing Stitches	
1500	13/15	1	
1600	20/15	2	

Delivery p. Rollo Z20 Medium Green			
Height in mm	Number horizontal-wires/ Distance vertical-wires	Drawing Stitches	
Role-legth 50 m			
2000	25/15	6	
Rollenlänge 100 m			


Delivery programm Rollo Z20 Super			
Height in mm	Number horizontal-wires/ Distance vertical-wires	Drawing Stitches	
Role length: 50 m			
2000	17/15	5	
2000	22/15	7	

Delivery p. Rollo Z20 Medium			
Height in mm	Number horizontal-wires/ Distance vertical-wires	Drawing Stitches	
1600	23/15	3	
1800	24/15	4	
2000	17/15	5	

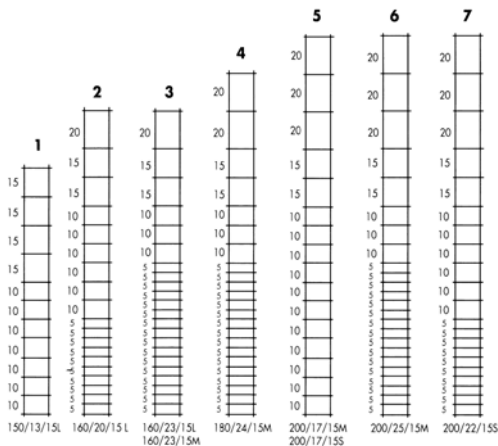

**Fence system**


# **AlClipTec S1**

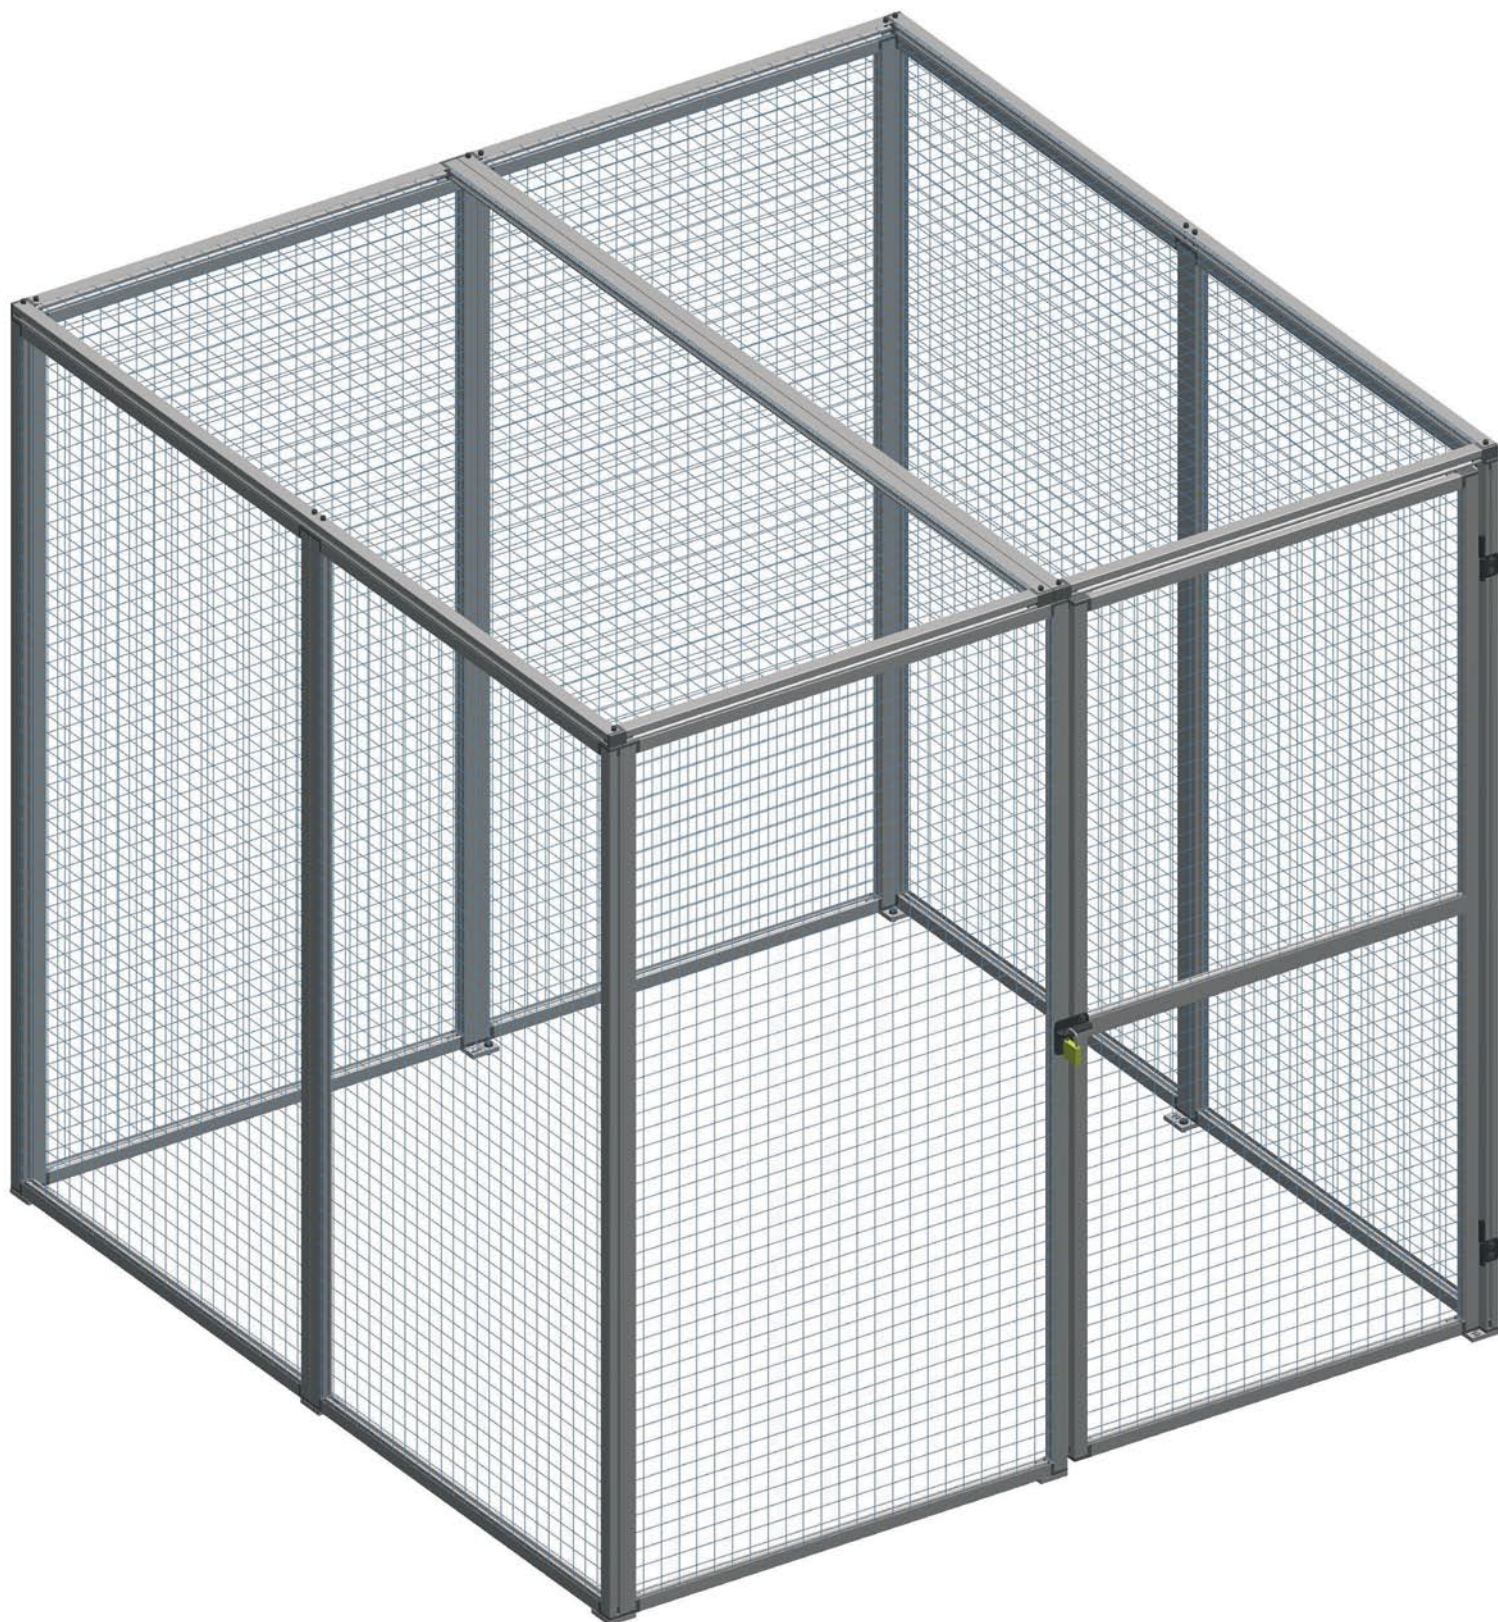

# Animal protection fence

## Uses


Also for for ex. Pavillions, room dividers, Dividers, cloakrooms, etc. been suitable.

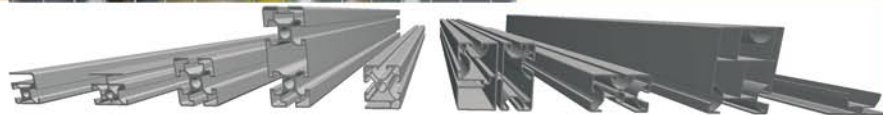

**This already in the industry proved There now is system AlClipTec S1 also for the private area. This specifically aluminum-profile developed enable through its distinction and Stability a multiplicity at Use-possibilities like for example Picture frames, aviaries, dog-boxings, Fence,... and much more.**

**We like to inform you about our unique system on inquiry and produce You a free offer.**

**Reputations or simply chalks up us you.**

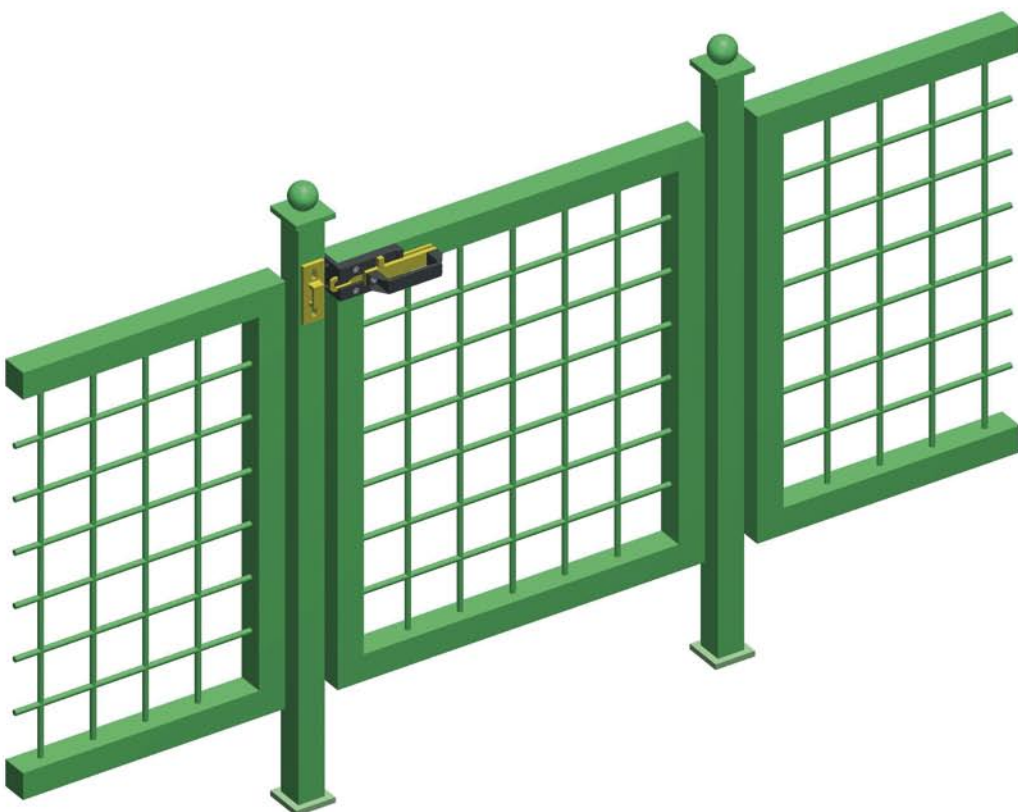

# Gate systems

## Garden-, wing, and slide gates



# Gate-systems

## Uses

All gate-systems can be tried on individually at the fence-systems.

**A wide spectrum started with 1m wide garden-gates until to 12m long ones motorized slide doors. We like to inform you about our gate-systems on inquiry and produce a free offer completely for you for both gate-systems and for our fence-systems with all elements.**

**Reputations or simply chalk up us and you**

**Will know more!**



## **Blank Metallbau Technik GmbH**

Industriegebiet Buch  
Max- Eyth- Str. 7- 9  
71088 Holzgerlingen

Tel.: (+49) 07031 73446- 0  
Fax: (+49) 07031 73446- 79

## **Blank Zaunsysteme**

Robert- Bosch- Str. 1  
71088 Holzgerlingen

Tel.: (+49) 07031 49670- 2  
Fax: (+49) 07031 49670- 4



**Blank Gruppe**